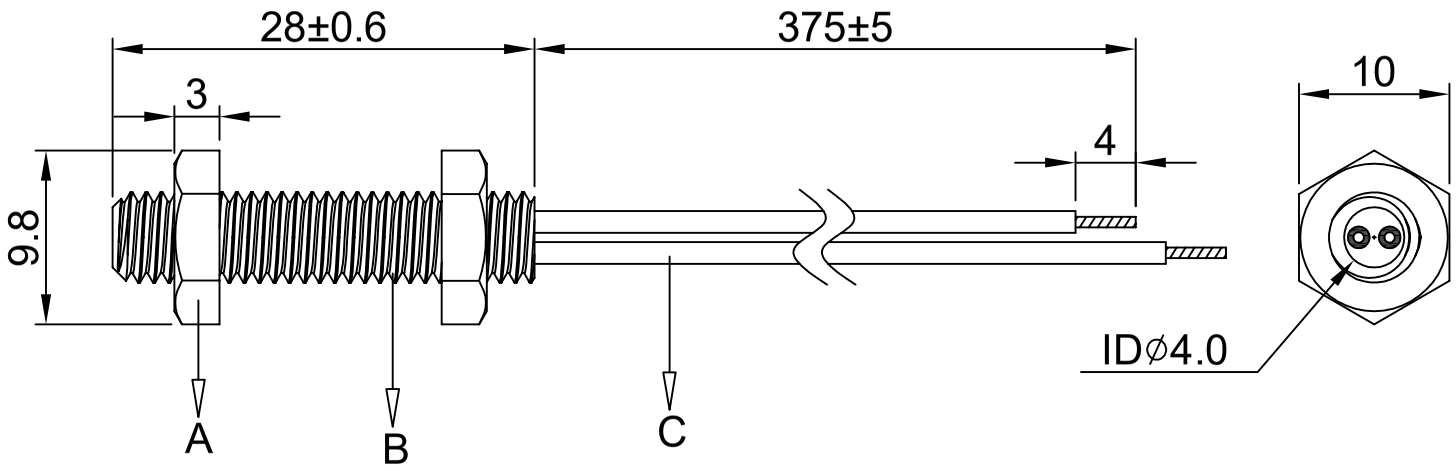

A	2 x M6 Lock Nut (302)
B	M6 Thread (302)
C	2 x UL 1007 24 AWG PVC White Wire

Electrical Characteristics	**Specifications**
Switched Power (max)	10W / 70W
Switched Voltage DC (max)	200VDC
Switched Current DC (max)	500mA / 1000mA
Carry Current DC (max)	1.0A / 1.75A
Breakdown Voltage (min)	250V / 400V

Item	Materials and Sepc
1	
2	
3	
4	
5	

Signa-ture		Date	

Item	Description	Rev. Date	Name
9			
8			
7			
6			
5			
4			
3			
2			
1			

Title : PS8-28 SERIES

Reed Sensor Solution **Cashtec Electronic Co., LTD**

Drawing No. :

Date	20090403	Dimension	mm	Tolerances	±0.3
Jerry		Alon	A4	A	Free
Drawn	Dsnd	Chkd	Paper	Rev.	Scale